



## Accessories



**PP vee-block Order No. 6710401**  
with four different prisms for mounting axis-symmetrical workpieces with diameters from 1 mm to 160 mm (0.0394 in to 6.30 in). Dimensions (L x W x H) 100 mm x 80 mm x 40 mm (3.91 in x 3.15 in x 1.58 in). Weight 1.5 kg (3.31 lb). Including clamping springs for holding light workpieces in the prism.

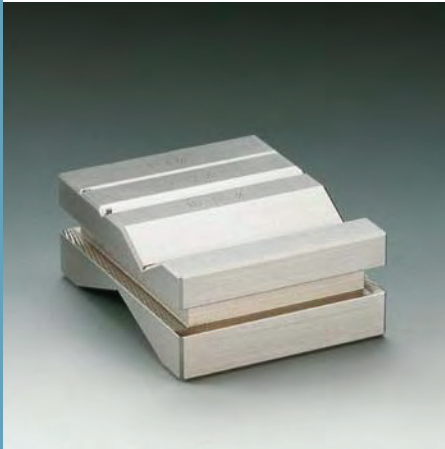

**XY table CT 120 Order No. 6710529**  
for mounting and aligning workpieces. Can be adjusted in two coordinates by 15 mm (.591 in). Table surface 120 mm x 120 mm (4.728 in x 4.728 in) with two brackets.

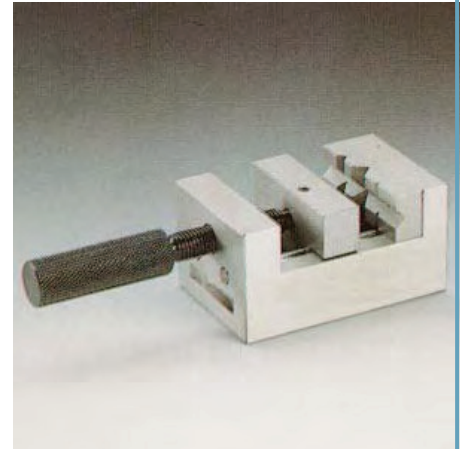

**PPS parallel vice Order No. 6710604**  
for mounting rectangular and cylindrical workpieces. Jaw width 70 mm (2.76 in), jaw height 25 mm (.984 in), span 40 mm (1.58 in), total height 58 mm (2.28 in). Weight 2 kg (4.41 lb).



### PGN 3 geometric standard

Surface roughness standard with a sinusoidal groove profile. Profile depth approx. 3 µm (120 µin), groove spacing approx. 0.12 mm (.00472 in). For checking the roughness measuring station.

**Mahr calibration certificate for PGN 3**  
**DKD calibration certificate for PGN 3**  
**Geometric standard PGN 1**  
**Geometric standard PGN 10**

**Order No. 6820601**

**Order No. 9027715**  
**Order No. 6980102**  
**Order No. 6820602**  
**Order No. 6820605**



### PRN 10 roughness standard Order No. 6820420

with Mahr calibration certificate. Roughness standard with turned profil, chromed. Profile depth approx. 10 µm (.394 µin). For checking the roughness measuring station.