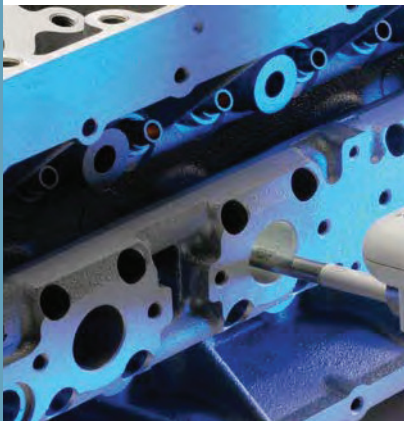
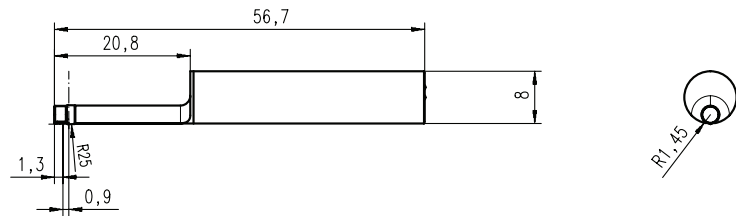




Optional pick-ups for MarSurf M 300

**PHT 3-350 pick-up****Order no. 611521**

Type	single-skid pick-up with spherical skid
Skid radius	25 mm (.984 in) in traversing direction, 1.45 mm (.0571 in) at right angles
Contact point	0.9 mm (.0354 in) in front of the stylus
Measuring range	350 μm (0.014 in)
Specification	for bores with a dia. larger than 3 mm (.118 in) and a max. depth of 17 mm (.669 in);

**Pick-up extension PHT (80 mm), Order no. 6850540** (for P-probes)**PHTF 0.5-100 pick-up****Order no. 611522**

Type	single-skid pick-up with spherical skid
Skid radius	25 mm (.984 in) in traversing direction, 1.45 mm (.0571 in) at right angles
Contact point	0.6 mm (.0236 in) beside the stylus
Measuring range	100 μm (0.00394 in)
Specification	e.g. for gear tooth flanks with a modulus larger than 0.8

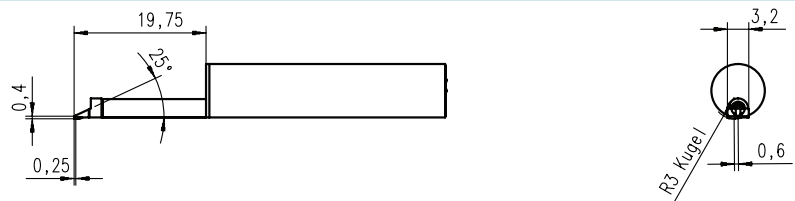**PHTR-100 pick-up****Order no. 611525**

Single-skid pick-up with lateral, spherical skid, radius 0.3 mm (.012 in) in traversing direction, stylus radius 2 μm (.0008 in), 90°
For measurements on concave and convex surfaces.

