

PROFILE PROJECTOR PH-3515F

Bulletin No. 2100



Heavy-Duty, Bench-Top Model with
Horizontal Optical System

Mitutoyo

Mitutoyo introduces the PH-3515F

Profile Projectors that will meet any optical measuring or inspection challenge your shop can offer!

PH-3515F PROFILE PROJECTOR



FEATURES

- Erect image on high brightness screen.
- 14" (353mm) dia. protractor screen with crosshairs and staggered lines for easy alignment.
- Digital angle measurement of 1' or 0.01° with built in angle counter.
- Floating-type workstage incorporates linear scales for fast, accurate measurement.
- Halogen contour illumination.
- Fiber-optic illumination cables and halogen included.
- Suitable for thread pitch measurements — free from blurred or distorted images when the workpiece is angled.
- Wide range of accessories for varied applications.

Also available:
Optional side mount surface
illumination unit **(172-133)**
(see page 4 for details)

KA COUNTER (OPTIONAL)




High performance, low cost 2-axis counter with traditional and advanced linear functions.

Order	174-173A
Scale input ports	2
Resolution	.00005"/.0001"/.0005"/0.001mm/0.005mm (changeable)
Display	7-digit LED and a negative [-] sign
Functions	Zero-setting, preset, counting direction setting, mm/inch conversion, 1/2 calculation, ABS/INC coordinate selection, diameter display, addition of 2-scale data, zero approach machining, bolt-hole circle machining, pitch machining, touch-signal probe input
Power supply	120VAC, 60Hz
Operating temperature	32°F to 104°F (0°C to 40°C)
Mass	2.43 lbs. (1.1kg)


WORKSTAGE

(STANDARD ACCESSORY)

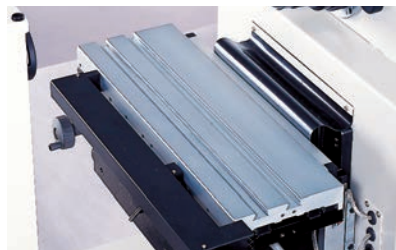

XY range	X-axis (horizontal travel): 10" (254mm) Y-axis (vertical travel): 6" (152mm)
Measuring unit	Linear Scale for each axis (AT100 Series)
Display unit	(Optional)
Stage size (WxD)	17.72"x5.75" (450x146mm)
Swivel range	±10° (30' readout)
Max. workpiece load	99 lbs. (45kg)
Dovetail groove	Two (Pitch= 1.69" (43mm))
Focusing travel	2" (50mm)

PROJECTION LENSES (OPTIONAL)

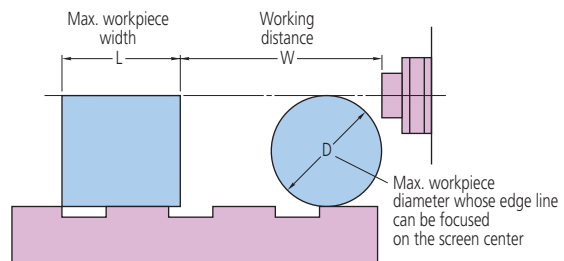

PH-3515F Unit: Inch

Illumination	Contour					Surface				
Magnification	5X	10X	20X	50X	100X	5X	10X	20X	50X	100X
View field dia.	2.80	1.40	.70	.28	.13	2.80	1.40	.70	.28	.13
W	6.30	3.66	1.57	.57	.37	2.52	1.61	1.57	.57	.37
L	6.89	9.25	9.25	3.15	4.29	6.89	9.25	9.25	3.15	4.29
D	6	6	4.57	1.20	.75	6	6	4.56	1.19	.75

QM-Data 200 (OPTIONAL)



QM-Data200

2-D data processing unit.

264-155A: Stand mount type


264-156A: Arm mount type

Mitutoyo launches a new 2D data processing unit for optical instruments. The QM-Data 200 can add new features of 2D coordinate measurement, image processing, etc. into your ordinary optical instruments to improve the QC control system.

OPTOEYE-200




SYSTEM DIAGRAM

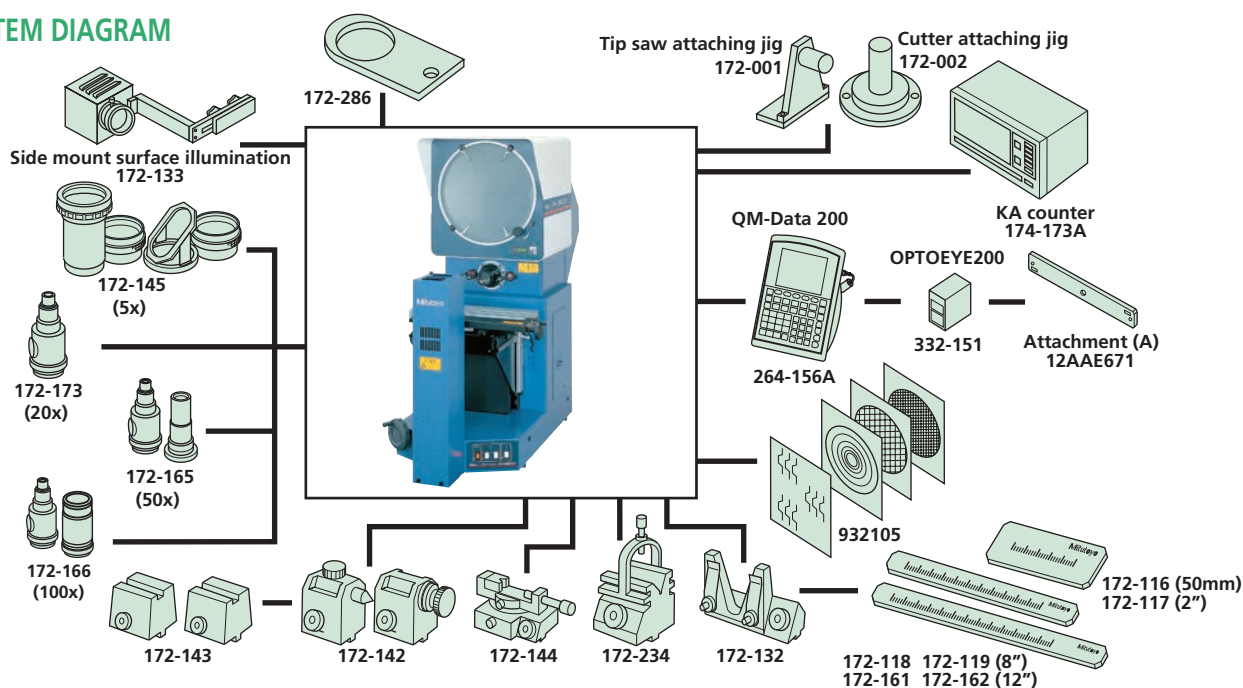

SPECIFICATIONS

Order No.		172-858A
Resolution		.0001"/.00005"/0.001mm/0.005mm
Projection lens		10X (172-184)
Magnification accuracy (Nominal magnification)		±0.1% under contour illumination, ±0.15% under surface illumination
Screen	Effective DIA	13.9" (353mm)
	Screen material	Fine-grain ground glass
	Reference line	Staggered crosses and crosshairs
Protractor	Display range	±360° displays up to ±370°
	Resolution	1'/0.01° switchable
Functions		ABS/INC mode switch, zero-setting
Contour illumination	Light source	Halogen bulb (24V, 150W)
	Optical system	Telecentric
	Functions	2-step brightness switching, cooling fan, heat-absorbing filter, green filter (optional)
Surface illumination	Light source	Halogen bulb (24V, 150W)
	Functions	Adjustable condenser lens (for all magnifications), cooling fan, heat-absorbing filter, green filter (optional)
Power supply		120VAC, 60Hz
Mass		331 lbs. (150kg)
Standard accessories		10X projection lens set, workstage, power cord, halogen bulb 24V 150W, 2pcs. (515530), machine cover (383228), user's manual
Optional accessories		Counter Stand (12AAF182)

DIMENSIONS

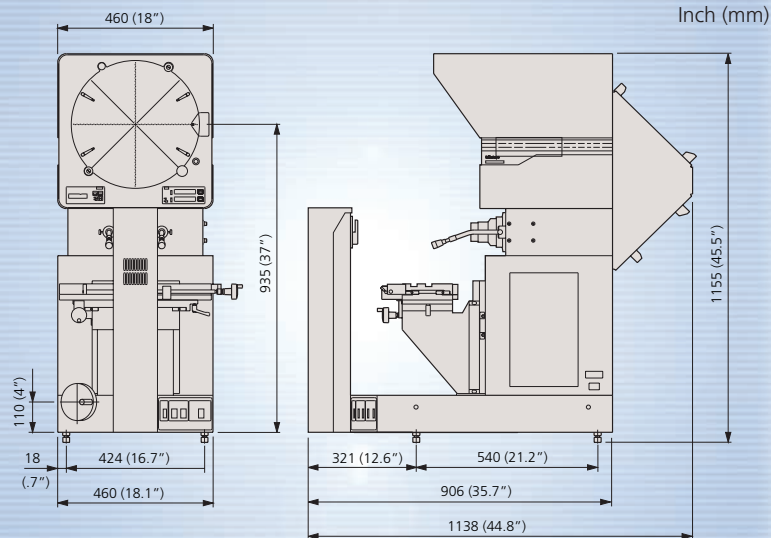

OPTIONAL ACCESSORIES

Vertical Holder



- Sets up a thin workpiece easily.

Rotary Vise



- Workpiece dia.: 60mm max.

Center Support Riser



- Widens the clamping capacity of the center support to a maximum diameter of 240mm.

Center Support



- Clamps a cylindrical workpiece such as a screw.
- Workpiece dia.: 120mm max.

V-block with Clamp



- Workpiece dia.: 50mm max.

Green Filter



- Increases the screen sharpness of the contour image.

Standard Scales

172-116 (50mm)
172-117 (2")



- Used for checking magnifying accuracy.

Stand



- Locking door
- 22"W x 25"H x 29"D

Reading Scales



- Designed for checking the magnified image of a standard scale.

172-118 (200mm)
172-161 (300mm)
172-119 (8")
172-162 (12")



Note: All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of Mitutoyo products may require prior approval by an appropriate governing authority.

Trademarks and Registrations

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.

We reserve the right to change specifications and prices without notice.

Coordinate Measuring Machines

Vision Measuring Systems

Form Measurement

Optical Measuring

Sensor Systems

Test Equipment and
Seismometers

Digital Scale and DRO Systems

Small Tool Instruments and
Data Management

Mitutoyo America Corporation

www.mitutoyo.com

One Number to Serve You Better
1-888-MITUTOYO (1-888-648-8869)

M³ Solution Centers

Aurora, Illinois
(Corporate Headquarters)

Westford, Massachusetts

Huntersville, North Carolina

Mason, Ohio

Plymouth, Michigan

City of Industry, California

Birmingham, Alabama

Mitutoyo
Precision is our Profession